

PAKHOMOV, I. I., TERENT'YEV, A. G.

Medical Instruments and apparatus - Periodicals

About the journal "Meditsinskaia promyshlennost' SSSR" (pharmaceutical and medical supplies industry of the U.S.S.R.). Med.prom. No. 3, 1952.

9. Monthly List of Russian Accessions, Library of Congress, August 1952. ~~XXXX~~ 1953, Uncl.

CA

1ST AND 2ND ORDERS

PROCESSES AND PROPERTIES INDEX

1ST AND 2ND ORDERS

Preparation of adiponitrile. V. V. Korshak and I. I. Pashonov. *J. Applied Chem.* (U. S. S. R.) 16, 632-6 (1941).—The authors studied the prepn. of $(CH_2)_4(CN)_2$ from the acid through the diamide. Adipic acid (140 g.) is heated to 190-200° and treated with a stream of NH_3 ; H_2O is condensed and its amt. is measured; at the end of the reaction 50-2 cc. H_2O satd. with NH_3 is obtained. The duration of reaction is 3-4 hrs.; near the end the mass becomes viscous and the temp. is raised to 210-20°, and NH_3 is stopped when the contents become nearly solid. The product is powdered while hot, and recrystd. from H_2O twice (several drops of concd. NH_4OH are added to the H_2O). Yield 90 g. (62%), m. 220-0.5°. The mother liquor yields almost all the unreacted acid. A series of expts. confirmed that the above temp. gives the highest yield of the $(CH_2)_4(CONH_2)_2$. The diamide (144 g.) and 357 g. Ac_2O (b. 138-40°) were treated with 1.5 g. NH_3 , molybdate and the mist. heated to 210°, finally to 220-30°, for a total of 2.5-3 hrs., with distn. of the $AcOH$ and Ac_2O , which are collected and weighed. When the distillate is 370-50 cc., suction is applied and the residual Ac_2O is distd. at 50-60 mm. The product is then distd. *in vacuo*, by 120-220°, washed with satd. $NaHCO_3$ soln.

and redistd. $(CH_2)_4(CN)_2$ is obtained after 2 redistns in 71.6% yield, b. 156-7°, d_4^{20} 0.9576, n_D^{20} 1.4381. A variation was tried as follows: 140 g. adipic acid was converted into the diamide as above and when the reaction mist. hardened, the NH_3 stream was stopped and 340 g. Ac_2O added with 1.5 g. NH_3 , molybdate or Al_2O_3 . Then $AcOH$ and excess Ac_2O were distd. and the nitrile distd. *in vacuo*, until decompn. became noticeable in the residue, which was then re-amidated and retreated with Ac_2O as above. A total of 93 g. crude nitrile was obtained, which on washing with satd. $NaHCO_3$ was redistd. *in vacuo*; $(CH_2)_4(CN)_2$, b. 156-9°, was obtained in 70% yield (70 g.). Some $AcNH_2$ was obtained from lower fractions during distn. of the product; it is apparently formed through $OH-NH_2$ exchange between $AcOH$ and $(CH_2)_4(CONH_2)_2$.
G. M. Kosolapoff

—the chemistry of the nitrile—

ADV. 5.1-A METALLURGICAL LITERATURE CLASSIFICATION

88000 1000000

100000 1000000

100000 1000000

10000 100000

10000 100000

KORESHKOV, V.I.; SHATSKAYA, L.N.; PAKHOMOV, I.M.

Concerning the strength of the frame of the KTN-2 mounted potato digger. Trakt. i sel'khoz mash. 32 no.5:30-33 My '62.

(MIRA 15:5)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut sel'skokhozyaystvennogo mashinostroyeniya (for Koreshkov, Shatskaya). 2. Zavod "Belinsk sel'mash" (for Pakhomov).

(Potato digger (Machine))

1970. 1. 1. PAKHOMOV, I.N.

... of
... ..
... ..

... ..
... ..

PAKHOMOV, I. V., Candidate Geolog-Mineralog Sci (diss) -- "The geology of the Kizel black-coal basin and its industrial evaluation on the basis of recent data". Sverdlovsk, 1959. 21 pp (Acad Sci USSR, Ural Affiliate), 150 copies (KL, No 23, 1959, 162)

PAKHOMOV, I.V., delegat XIII s"yezda Kommunisticheskoy partii Sovetskogo
Soyuza

Introducing new equipment and improving production economics
at the "Electric Heavy Machinery" Plant named after V.I. Lenin.
Vest elektroprom. 33 no.1-1-4 Ja '62. (MIRA 14:11)

1. Direktor zavoda "Elektrot'yazhmash" imeni V.I. Lenina
(Electric machinery industry)

AUTHOR: Pakhomov, I.V., 132-58-5-4/14

TITLE: On the Method of Prospecting for Coal Deposits in the Kizel Basin (O metodike razvedki ugol'nykh mestorozhdeniy v kizelovskom bassejne)

PERIODICAL: Razvedka i Okhrana Nedr, 1958, Nr 5, pp 24-28 (USSR)

ABSTRACT: Owing to the complicated structure of the Kizel basin the author recommends the division of all coal deposits into three groups, according to the geologic structure of the basin. The method of prospecting varies for each of these groups. These methods are described in detail.

ASSOCIATION: Permskiy gornyy institut (Perm. Mining Institute)

AVAILABLE: Library of Congress

Card 1/1 1. Coal 2. Geological prospecting

PAVLOV, A.; PAKHOMOV, K.; LOBACHEVSKIY, S.; SOTNIKOV, B.; KALININ, P.

People of the seven-year plan. Stroitel' no.2:10-11 P '60.
(MIRA 13:5)

1. Nachal'nik otдела truda i zarplaty treста Magnitostroy
(for Sotnikov). 2. Nachal'nik Nauchno-issledovatel'skogo
sektora treста Magnitostroy (for Lobachevskiy). 3. Brigadir
kompleksnoy brigady konechnoy produktsii treста Mosstroy-17
(for Kalinin).

(Construction workers)

PAKHOMOV, K.

Change in the appearance of Siberian villages. Sel'.stroi. 13
no.3:12 Mr '59. (MIRA 12:5)

1. Nachal'nik Kirovskogo rayonnogo otдела po stroitel'stvu v
kolkhozakh Irkutskoy oblasti.
(Kirovsk District--Farm buildings)

DEM'YANOV, L.A., kand.tekhn.nauk; AKHTYAMOV, U.S.; AGEYEV, I.V.; PAKHOMOV, K.A.
SARAFANOV, S.K.

Performance of IaAZ-204 engines fueled with light gasoline. Avt.prom.
no.2:23-27 P '61. (MIRA 14:3)
(Automobiles—Engines)(Gasoline)

PAKHOMOV, K.S., mayor tekhnicheskoy sluzhby: ZHURAVLEV, K.A.. mevor
tekhnicheskoy sluzhby.

Concerning guaranteed periods for storage. Vest. Vozd. Fl.
no.5:83 '61. (MIRA 14:8)
(Russia--Air Force--Aviation supplies and stores)

PAKhmeny, L. H.

Essential wave aerological observations	507/508
Trudy, 77, 31 (Transactions of the Central Aerological Observatory, 30, 31)	
Moscow, 1979, 31 p. 690 copies printed.	
Additional Spontaneous Acoustic Noise. Glossary of aerological observations	
84.1 (Title page): S. M. Shumakov, M. (Inside book): M. I. Gorbunov;	
Teach. M., 2, 10, 100, 1000.	
REMARKS: This publication is intended for aerologists and aircraft instrument	
engineers.	
COMMENTS: This collection of 11 articles deals mainly with the problem of finding	
the best method of measuring atmospheric turbulence from aircraft. A detailed	
description of the aerological instruments used for this purpose is given.	
Find observations by means of radio theodolite is discussed. References accom-	
pany individual articles.	
Yusubov, A. M., and O. S. Shuk. Studying the Energy Spectrum of the	96
Stationary Random Process Recorded Graphically	
Yusubov, A. M. Electrical Integration of a Force on a Constant Voltage	93
Amplifier With an Electromechanical Converter	
Shuk, O. S. Electronic Control of a Force	90
Gorbunov, M. I., and A. A. Chernikov. Investigation of Turbulence	53
in Flows by Radar	
Shumakov, S. M., S. M. Gorbunov, and V. B. Shuk. Improved Airborne	64
Electromechanical Converter	
Shumakov, L. A. Effect of the Turbulence of Temperature Disturbances of	74
Aerological Instruments Upon the Results of the Investigation of	
Turbulence Layers	
Bukharin, N. V., and G. P. Dubinskaya. New Data on the Structure	79
of Atmospheric Turbulence Causing Aircraft Deviations	
Gorbunov, M. I., and A. M. Dubinskaya. Accuracy of the Determination	
of Wind Direction and Velocity at Different Altitudes by Means of	
the "Palantir" Radio Theodolite	69
AVIATION: Library of Congress	
Card 3/3	

20/Jan/80
10-13-80

PAKHOMOV, L.A.

Inertia effect of the temperature pickup in aerological instruments on the results of inversion layer investigations. Trudy
TSAO no. 31:74-78 '59. (MIRA 12:9)
(meteorological instruments)
(atmospheric temperature)

BELYAYEV, V.P.; VINNICHENKO, N.K.; PAKHOMOV, L.A.

Electrometeorograph for helicopters (VEM). Trudy GGO no.135:
135-146 '62. (MIRA 15:8)
(Meteorological instruments)

PAKHOMOV, L.A.

Airplane apparatus for measuring the vector of wind. Trudy TSAO
no.41:91-105 '62. (MIRA 16:10)

ACCESSION NR: AT4033562

S/2922/63/009/000/0124/0132

AUTHOR: Belyayev, V. P.; Vinnichenko, N. K.; Pakhomov, L. A.

TITLE: Helicopter electrometeorograph

SOURCE: Vsesoyuznoye nauchnoye meteorologicheskoye soveshchaniye. 1st, Leningrad, 1961. Pribyory* i metody* nablyudeniya (Instruments and methods of observation); trudy* soveshchaniya, v. 9, Leningrad, Gidrometeoizdat, 1963, 124-132

TOPIC TAGS: meteorology, meteorological instrument, meteorograph, electrometeorograph, helicopter electrometeorograph

ABSTRACT: A helicopter electrometeorograph was developed by the Tsentral'naya aerologicheskaya observatoriya (Central Aerological Observatory) in 1960. The instrument is used for highly accurate measurement of temperature, temperature fluctuations, pressure, air humidity and helicopter overload. All these parameters are converted into electric pulses. A block diagram is shown as fig. 1 of the Enclosure. The instrument is broken down into units for easy placement on a helicopter where space is at a premium. The temperature sensors are three resistance thermometers manufactured from a special platinum wire 0.06 mm in diameter; the resistance of each thermometer is approximately 130 ohms (at $t = 20^{\circ}\text{C}$).

Card

1/3

ACCESSION NR: AT4033562

The humidity sensor is a specially processed animal membrane. A special support extending from the nose of the aircraft supports the temperature, temperature fluctuation and pressure sensors. The pressure sensor employs an aneroid unit of phosphor bronze. An MP-23 potentiometric sensor, placed at the center of gravity of the helicopter, is used to detect aircraft overloads. The range of measured overloads is ± 1.5 g. The five meteorological parameters are recorded simultaneously with a K-12-21 oscillograph. Air temperature is determined with a maximum error less than $\pm 0.5^\circ\text{C}$ in the range from -20 to $+30^\circ\text{C}$, temperature fluctuations are measured in the range $\pm 3^\circ\text{C}$ with a maximum error less than $\pm 0.2^\circ\text{C}$ in the frequency range from 0.01 to 5 cps, the relative humidity unit determines this parameter with a maximum error less than $\pm 7\%$ in the range 25 to 100%, the pressure unit measures pressure in the range 1025 to 700 mb with a maximum error not exceeding ± 3 mb. The apparatus has been tested on 50 flights with a total duration of about 110 hours. Orig. art. has: 7 figures.

ASSOCIATION: Tsentral'naya aerologicheskaya observatoriya (Central Aerological Observatory)

SUBMITTED: 00

DATE ACQ: 16Apr64

ENCL: 01

SUB CODE: ES

NO REF SOV: 000

OTHER: 000

Card 2/3

ACCESSION NR: AT4033562

ENCLOSURE: 01

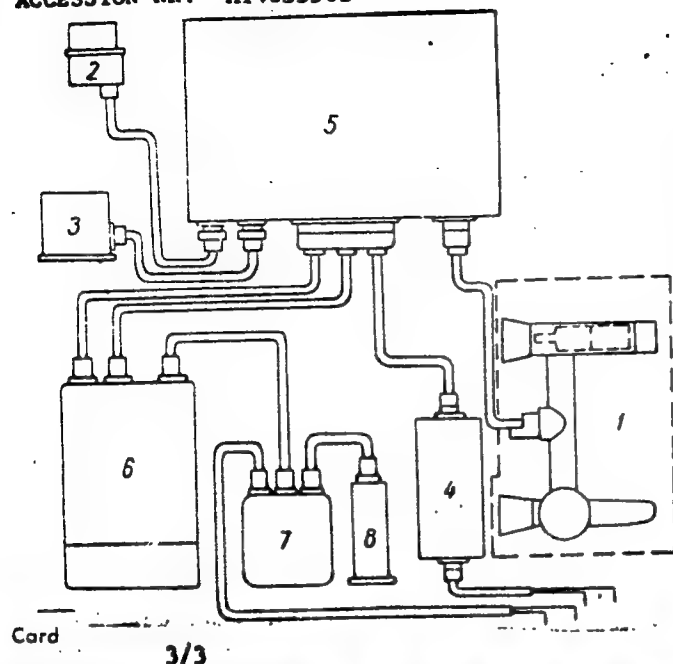


Fig. 1. Block diagram of helicopter electrometeorograph. 1 -- support extending from nose of helicopter with temperature, temperature fluctuation and humidity sensors; 2 -- potentiometric pressure sensor; 3 -- MP-23 potentiometric overload sensor; 4 -- power source; 5 -- measurement bridges; 6 -- K-12-21 optical recorder; 7 -- remote-control apparatus for recorder; 8 -- electric clock; 9 -- calibration unit.

L-12421-65 EEO-2/EWT(d)/EWT(1)/FGG/EEC-4 Pn-h/Pe-h/PP-h/Pq-h/Pg-h/Pk-h/
PL-L ASD(r)-2/ESD(t) GW/BC

ACCESSION NR: AT4046027

S/2789/64/000/055/0003/0017

AUTHOR: Pakhomov, L. A.

TITLE: Method of measuring the vertical velocity of a plane in
the entire frequency spectrum of its changes

SOURCE: Tsentral'naya aerologicheskaya observatoriya. Trudy*, no.
55, 1964. Voprosy* fiziki oblakov (Problems of cloud physics),
3-17

TOPIC TAGS: vertical velocity measurements, atmospheric tur-
bulence, aircraft vertical velocity, aircraft meteorological mea-
surement.

ABSTRACT: The defects of the overload variometer and integrator
(the only instruments currently used to measure the vertical ve-
locity of an airplane) are analyzed. It is shown that combining
these two instruments into a single system makes it possible to
solve the problem of measuring the vertical velocity of a plane
in the entire spectrum of frequencies of its changes. A specific
Card 1/2

L 12421-65

ACCESSION NR: AT4046027

scheme for such a system is described. A test of the working model of the system indicated that, with the frequency ranges used, errors almost never exceeded 10%. Orig. art. has: 20 formulas, 6 figures, and 1 table.

ASSOCIATION: Tsentral'naya aerologicheskaya observatoriya (Central Aerological Observatory)

SUBMITTED: 00

ATD PRESS: 3/2/

ENCL: 00

SUB CODE: AC

NO REF SOV: 005

OTHER: 002

Card 2/2

PAKHOMOV, Leonid Afenas'yevich; PINUS, Naum Zinov'yevich; SHMETER,
Solomon Moiseyevich; KORNILENKO, V.S., red.; ZARKH, I.M.,
tekhn.red.

[Aerological research on the variability of the atmospheric
refraction coefficient for ultrashort radio waves] Aerologi-
cheskie issledovaniia izmenchivosti koeffitsienta prelomleniia
atmosfery dlia ul'trakorotkikh radiovoln. Moskva, Gidrometeor.
izd-vo, 1960. 101 p. (MIRA 14:1)
(Microwaves) (Refraction)

I. 44178-66 EWP(e)/ENT(m) WW/WH

ACC NR: AP6011280 (A) SOURCE CODE: UR/0413/66/000/006/0157/0157

41
C

INVENTOR: Fialkov, A. S.; Davidovich, Ya. G.; Pakhomov, L. G.

ORG: none

TITLE: Treatment of carbon-graphite products. Class 21, No. 141194¹⁵

SOURCE: Izobreteniya, promyshlennyye obraztsy, tovarnyye znaki, no. 6, 1966, 157

TOPIC TAGS: carbon graphite product, ~~current treatment~~ carbon product, graphite, physical chemistry property, semiconductor

ABSTRACT: This Author Certificate introduces a method for treating carbon-graphite products by passing a-c and d-c current through them. To obtain a sharply defined boundary of physical, chemical, and semiconductive properties along the length of the product, current of various magnitude is passed through various sections of the product at the same time that they are subjected to various degrees of cooling.

[LD]

SUB CODE: 11/3/ SUBM DATE: 03Jan61/

auth
Card 1/1

PETRUNKIN, V.Yu.; MOLOTKOV, V.I.; PAKHOMOV, L.N.; PELLIKAN, S.G.

Low-power ferrite-equipped magnetic amplifiers for audio frequencies.
Trudy LPI no.194:69-74 ' 58. (MIRA 11:11)

(Magnetic amplifiers)

ACC NR: AP7002676

SOURCE CODE: UR/0109/67/012/001/0146/0149

AUTHOR: Petrun'kin, V. Yu.; Yesepkina, N. A.; Kruzhalov, S. V.; Pakhomov, L. N.; Chernov, V. A.

ORG: none

TITLE: Formation of the traveling wave in a complex optical resonator

SOURCE: Radiotekhnika i elektronika, v. 12, no. 1, 1967, 146-149

TOPIC TAGS: laser, ring laser, traveling wave, ~~laser, traveling wave, ring laser~~
~~resonator, optic resonator~~

ABSTRACT: An analysis is made of a method for calculating a ring resonator with supplementary external mirrors to obtain traveling wave excitation. The method is based on the theory of long lines as applied to the analysis of conditions for natural oscillation of the system. The essential part of the external arrangement is a system of two mirrors: one, with a partial transmission, is inclined to the beam, and the other, which is fully reflecting, is placed perpendicularly to the beam. A system of equations is given for the wave amplitudes as functions of the distance between the mirrors and their transmission and reflective indexes. The scattering matrix of the system is determined relative to the complex wave number, the real and imaginary parts of which represent, respectively, the natural frequency and the attenuation factors. The problem is solved for certain special cases, and from these solutions the relationship between the wave number and the parameters of the entire system (expressed

Card 1/2

UDC: 621.372.4.029.67

ACC NR: AP7002676

through a constant) can be deduced. Generally, however, the unavoidable reflection from the end facer of the resonator produces a reverse wave which must be eliminated before the operating traveling wave can travel only in one direction. This can be achieved either by coatings or by causing the reflected beams to deviate from the resonator axis and thus be ousted from the system. A rectangular ring laser, with near-optimal parameters, equipped with two supplementary mirrors as described, and with the end reflection eliminated by inclination of the active medium with respect to the resonator optical axis, was experimentally investigated under actual traveling-wave operation. Orig. art. has: 3 figures and 10 formulas. [WA-14]

SUB CODE: 20/ SUBM DATE: 29Jun66/ ORIG REF: 001/ OTH REF: 002/

Cord 2/2

ACC NR: AP7001312

SOURCE CODE: UR/0057/66/036/012/2171/2174

AUTHOR: Bonch-Bruyevich, A. M.; Petrun'kin, V. Yu.; Arzumov, V. N.; Yezephina, N. A.; Imas, Ya. A.; Kruzhakov, S. V.; Pakhomov, L. M.; Chernov, N. A.

ORG: none

TITLE: A study of a neodymium glass laser with external feedback

SOURCE: Zhurnal tekhnicheskoy fiziki, v. 36, no. 12, 1966, 2171-2174

TOPIC TAGS: solid state laser, glass laser, neodymium glass laser, traveling wave laser, laser r and d

ABSTRACT: A study was made of a traveling-wave external-feedback neodymium glass laser, the experimental setup of which is shown in Fig. 1. The external cavity consisted of four mirrors arranged in a rectangular pattern (1.5 x 0.5 m). The output mirror (5') was 80% reflective and the three other mirrors were 99% reflective. The active medium was a cylindrical glass rod 240 mm long and 25 mm in diameter. The laser was pumped by two IFK-15,000 flashlamps fed from a condenser bank having a total stored energy of 30 kJ. A Faraday-effect cell, consisting of a quartz plate and a polarizer (six plane-parallel Brewster-angle plates) was used to achieve traveling-wave operation. A DFS-8 spectrograph (dispersion 6 Å/mm) and a Fabry-Perot interferometer were used to observe the emission spectra of the laser at various pumping levels and with the Faraday cell in and out of the feedback circuit. It was shown that the emission spectra of traveling-wave lasers are virtually line spectra and

UDC: 621.378.32

Card 1/2

ACC NR. AP7001312




Fig. 1. Experimental setup of a traveling-wave laser

- 1 - Working substance; 2 - quartz plate;
- 3 - Paraday cell; 4 - polarizer;
- 5 - 5" - mirrors; 6 - photocells;
- 7 - spectrograph slit.

that the spiking sequence is better ordered than that of standing-wave lasers. A reduction of the spectrum to a single narrow line, which has been observed in traveling-wave ruby lasers, was not encountered in the present laser. Such narrowing in the traveling-wave operation will not occur unless the luminescence line of the working substance broadens, as it does in rubies. The high-intensity lines observed in the experiments corresponded to the uniform broadening of luminescence lines of the dopant. Orig. art. has: 5 figures.

SUB CODE: 20/ SUBM DATE: 01Jun66/ OTH REF: 003/ ATD PRESS: 5110
Card 2/2

[YK]

SOV/120-58-2-22/37

AUTHORS: Ipatov, V. A., Pakhomov, L. P.

TITLE: A Photoelectric Instrument for the Determination of the Concentration of Mercury Vapour in Air (Fotoelektricheskiy pribor dlya opredeleniya kontsentratsii parov rtuti v vozdukh)

PERIODICAL: Pribory i Tekhnika Eksperimenta, 1957, Nr 2, pp 41-44 (USSR)

ABSTRACT: A description is given of a portable instrument which can be used to determine quickly and conveniently the concentration of mercury vapour in air. The instrument is based on the absorption by a vapour of ultraviolet radiation having a wavelength of 2537 Å. The intensity of the radiation is measured by a photomultiplier. The output of the photomultiplier is fed to an electric circuit which uses only diode and triode transistors. The circuit used is shown in detail in Fig. 5. The scale of the instrument is linear and full scale deflection corresponds to 120 µg/m³. A complete analysis of mercury vapour concentration in a given room can be carried out in 30-40 sec.

Card 1/2

SOV/120-58-2-00/37

A Photoelectric Instrument for the Determination of the Content of Mercury Vapor in Air.

There are 4 figures, no tables and 3 references, of which 2 are English and 1 is Soviet.

ASSOCIATION: Fiziko-tekhnicheskii institut AN SSSR (Physico-Technical Institute of the Academy of Sciences of the USSR)

SUBMITTED: May 13, 1957.

Card 2/2

1. Air--Analysis
2. Mercury vapor--Determination
3. Photoelectric equipment--Applications

25025

S/057/61/031/007/006/02:
B108/B209

9,4120

AUTHORS: Golant, V. Ye., Orlov, M. I., Pakhomov, L. P.

TITLE: Production of a high-density plasma by a hot-cathode discharge in a magnetic field

PERIODICAL: Zhurnal tekhnicheskoy fiziki, v 31, no. 7, 1961, 797-801

TEXT: The authors present the results of an investigation of a hot-cathode discharge in a magnetic field. In such a discharge with a current density of over 1 a/cm^2 in an inhomogeneous magnetic field ($H/H_c > 1:5$; H_c - magnetic field strength in the region under examination, H_c - magnetic field strength near the cathode, a plasma concentration of over 10^{14} cm^{-3} may be attained theoretically. It was the aim of the present investigation to determine the concentration of charged particles in such a plasma. The emitting area on a loop- or ring-shaped cathode was 1 cm^2 , its temperature over 2000°C . The distance between the tungsten anode and cathode was 1 cm . The measurements were made in both a homogeneous and an inhomogeneous mag-

Chap. 1.3

25025

S/007 61/031/007, 006 021
B'06/120-

...tion of a high-density,
... fields of up to 1000 oersteds. The discharge was kept in a hydrogen
... sphere of 10^{-4} mm in at a voltage of between 10 and 100 volts. In a
... field, the discharge had the shape of a pear with radius of
... mm; concentration at a current of 10^{-3} A was 10^{13} cm $^{-3}$. In the case
... of an inhomogeneous magnetic field, the plasma cord was found to be cylin-
... drically symmetric, however with variable thickness, due to an azimuthal
... field of the particles in the inhomogeneous field. In an inhomogeneous
... field up to 2000 oersteds, the concentration of the plasma as measured
... laser-wave scanning exceeded 10^{14} cm $^{-3}$. Finally, the authors thank
... A. I. Tititsyna for the optical measurements, V. V. Rozhdestvenskiy for the
... scattering, M. M. Larionov for having measured the back round radiation, and
... A. G. P. Konstantinov for discussion. There are 4 figures and
4 references. 2 Soviet-bloc and 2 non-Soviet-bloc.

ASSOCIATION: Fiziko-tekhnicheskiy institut im. A. F. Ioffe AN SSSR
Leningrad (Institute of Physics and Technology imeni
A. F. Ioffe AS USSR Leningrad)

Card 2/3

PAKHOMOV, M.

Machine-Tractor Stations

Tractor brigade in the effort to obtain a high yield. MTS 12, no. 2, 1955.

9. Monthly List of Russian Accessions, Library of Congress, August 1953, Unclassified.

2

SECRET

1. The following information was obtained from a source who has provided reliable information in the past.

2. The source has provided reliable information in the past and is being provided for your information.

AGAKHANYANTS, O. Ye.; PAKHOMOV, M.M.; TROFIMOV, A.K.

Paleogeography of the Pamirs during the Holocene. Izv. Vses. geog.
ob-va 96 no.6:505-509 N-O '64 (MIRA 18:1)

PAKHOMOV, M.M.

Vegetation and climate of the tundra during the Upper Pleistocene
and the recent epoch; according to spore and pollen analysis data.
Izv. AN SSSR Ser. geogr. nauki: 194-89 Ja-8 1951.

1. Institut geogr. AN SSSR, Leningrad.

1951A 1810

PAKHOMOV, M.M.

Paleogeography of the Quaternary period in the eastern Pamirs.
Dokl. AN SSSR 141 no.5:1191-1193 D '61. (MIRA 14:12)

1. Predstavleno akademikom V.N. Sukachevym.
(Pamirs--Paleogeography)

MEDEL', Vladimir Borisovich. Primal uchastiye GRIGOR'YEV, Ye.T.,
inzh.; PAKHOMOV, M.P., doktor tekhn. nauk, retsenzent;
BOGDANOV, V.P., kand. tekhn.nauk, retsenzent; LISOVSKIY,
A.S., kand. tekhn. nauk; KROVORUCHKO, N.M., inzh., red.;
VOROTNIKOVA, L.F., tekhn. red.

[Design of the mechanical part of electric rolling stock]
Proektirovanie mekhanicheskoi chasti elektropodvishnogo
sostava. Moskva, Transzheldorizdat, 1963. 422 p.

(MIRA 16:10)

(Electric railroads--Rolling stock)

PAKHOMOV, M.P., doktor tekhn.nauk

Generalization on the operation of a.c. and d.c. contact
network jointing posts. [Trudy] LIIZHT no.193:145-153
'62. (MIRA 15:12)

1. Novosibirskiy institut inzhenerov zheleznodorozhnogo
transporta.
(Siberia, Eastern ~~Electric~~ railroads—Current supply)

PAKHOMOV, M.P., doktor tekhn. nauk

Taking voltage losses in the overhead contact system into
account in plotting the speed curve. Trudy NIIZHT 26:63-66 '62.
(MIRA 16:8)

(Electric railroads---Train speed)

PAKHOMOV, M. P., Doc Tech Sci -- (diss) "Research into vertical oscillations and interaction of electric trains on track." Moscow, 1960. 35 pp; (Ministry of Railroads, Moscow Order of Lenin and Order of Labor Red Banner Railroad Transport Engineers Inst im I. V. Stalin); 170 copies; price not given; bibliography at end of text; (KL, 27-60, 151)

PAKHOMOV, M.P.

Effect of the elasticity of track on the free vertical vibration of
the electric locomotive. Izv.vost.fil.AN SSSR no.7:93-100 '57.

(MIRA 10:10)

1. Novosibirskiy institut inzhenerov zheleznodorozhnogo transporta.
(Railroads--Track) (Electric locomotives--Vibration)

SOV/124-58-1-1259

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 1, p 156 (USSR)

AUTHOR: Pakhomov, M. P.

TITLE: The Impact of an Electric Locomotive on the Track in the Vicinity
of a Rail Joint (Vozdeystviye elektrovoza na put' v zone styka)

PERIODICAL: Vestn. Vses. n.-i. in-ta zh.-d. transp., 1957, Nr 4, pp 30-34

ABSTRACT: The author presents a method for the computation of the force
exerted by a wheel having a nonuniform rolling surface, an
elliptical tire, etc., on a track having a variable or constant
stiffness.

Reviewer's name not given

Card 1/1

PAKHOMOV, M.P., dets. kand. tekhn. nauk

Experimental investigations of electric locomotive vibrations and
their effect on the track. Trudy MIIT no.103:44-64 '58.

(MIRA 11:12)

(Electric locomotives--Vibration)

(Railroads--Track)

124-58-6-6322

Translation from: Referativnyy zhurnal, Mekhanika, 1958, Nr 6, p 6 (USSR)

AUTHOR: Pakhomov, M. P.

TITLE: The Effect of the Elasticity of the Roadbed on the Free Vertical Vibrations of an Electric Locomotive (O vliyanii uprugosti puti na svobodnyye vertikal'nyye kolebaniya elektrovoza)

PERIODICAL: Izv. vost. fil. AN SSSR, 1957, Nr 7, pp 93-100

ABSTRACT: Bibliographic entry

1. Railroads--Elasticity
2. Locomotives--Vibration
3. Elasticity--Test results

Card 1/1

PAKHOMOV, M.P., kand. tekhn. nauk (Novosibirsk).

Action of the ES electric locomotive on the track. Zhel. dor. transp.
39 no.12:42-45 D '57. (MIRA 11:1)

(Electric locomotives)

PAKHOMOV, M.P., kand.tekhn.nauk

Action of the wheels of electric locomotives (diesel locomotives, cars) on a track with nonuniform elasticity. Vest.TSNII MP3 20 no.5:38-40 '61. (MIRA 14:8)

1. Novosibirskiy institut inzhenerov zheleznodorozhnogo transporta.
(Railroads--Track) (Railroads--Rolling stock)

PAKHOMOV, M.P., kand. tekhn. nauk, dots.

Interaction of the rail with a flat wheel. Vest. TSNII MPS 18
no.5:22-27 Ag '59. (MIRA 13:1)

1. Novosibirskiy institut inzhenerov zheleznodorozhnogo transporta.
(Railroads--Rails) (Car wheels)

PAKHOMOV, M.P., kandidat tekhnicheskikh nauk.

Action of an electric locomotive on the track at the joint area.
Vest. TSNII MPS 16 no. 4:30-34 Jo '57. (MLBA 10:8)
(Railroads--Track)

L 36211-65 ENT(1)/ENT(m)/EPR/EPA(w)-2/EEC(t)/ENP(t)/ENP(b) Pub-10/PS-4
IJP(a) JD
ACCESSION NR: AP5007099 S/0109/65/010/003/0530/0536

AUTHOR: Pakhomov, M. T.

TITLE: Secondary electron emission penetrating thin MgO films

SOURCE: Radiotekhnika i elektronika, v. 10, no. 3, 1965, 530-536

TOPIC TAGS: electron emission, secondary emission

ABSTRACT: The results of an experimental investigation of the secondary penetrating emission (at 10^{-6} torr) from 200-400-Å-thick MgO films covering an aluminum-oxide backing or a fine-structure copper gauze are reported. It is found that: 1) The MgO films on an aluminum-oxide backing have a maximum secondary-emission ratio (SER) of 3.8 at 2.2 kev. 2) The same films on copper gauze (with a 100-μ pitch) have a SER of 6.3-7.8 at 2.0 kev which is due to the saving of losses in the backing and to a better MgO-film structure. 3) After holding the MgO films in dry-room air, their SER decreases; the films can be

Card 1/2

L. 36211-65
ACCESSION NR: AP5007099

reactivated by vacuum-heating at 320-340C for 30 min; both processes depend on the actual proportion of Mg and MgO in the film. Orig. art. has: 7 figures. [03]

ASSOCIATION: none

SUBMITTED: 03Feb64

ENCL: 00

SUB CODE: 55, NP

NO REF SOV: 003

OTHER: 004

ATD PRESS: 3220

Cord 2/2 60

L 17013-66 EWT(1)/EWT(m)/EWA(d)/EWP(t)/EWA(h) IJP(c) MJW/JD

ACC NR: AP6001586

SOURCE CODE: UR/0120/65/000/006/0167/0169

AUTHOR: Melamid, A. Ye.; Pakhomov, M. T.

ORG: none

TITLE: Small-size photomultiplier with oxygen-silver-cesium photocathode

SOURCE: Pribery i tekhnika eksperimenta, no. 6, 1965, 167-169

TOPIC TAGS: photomultiplier

ABSTRACT: A photomultiplier with high stability and increased threshold sensitivity is described. The multiplier consists of a semitransparent oxygen-silver-cesium photocathode 5 mm in diameter and a multiplying system provided with the dynodes made of AMEK alloy. Because of its small dimensions and some design innovations, the multiplier can withstand impacts up to 50 g and vibrations up to 1 kc. In the production of the multiplier, special attention was paid not only to the accurate distillation of cesium vapor excess but also to reducing to a minimum the amount of cesium oxide formed on the dynodes. Photocathodes with a sensitivity of 20—35 $\mu\text{amp/lm}$ were thus produced. Tests showed an instability of only 1 0.3% for six hours of continuous operation at an anode current of 1 μamp . A high threshold sensitivity (6×10^{-12} — 2.5×10^{-11} lm/cps 1/2) was achieved in conjunction with a high infrared sensitivity. Threshold sensitivity for an optimum signal-to-noise ratio was at its maximum at an operating voltage of 1200—1400 v. The multiplier is recommended as a detector of very weak light flux. Orig. art. has: 4 figures and 1 table. [KM]

Card 1/2

UDC: 621.383.292

L 17013-66

ACC NR: AP6001586

SUB CODE: 20/ SUBM DATE: 11Nov64/ ORIG REF: 003/ OTH REF: 002/ ATD PRESS:

4207

Card 212 M J 5

PAKHOMOV, N.

The housing and public services of Ryazan are on the upgrade.
Zhil.-kom.khoz. 7 no.8:3-5 '57. (MIRA 10:10)

1. Sekretar' Ryazanskogo gorkoma Kommunisticheskoy partii-Sovetskogo
Soyusa.

(Ryazan--Municipal services)

PAKHOMOV, N.; BALAKSHIN, N.

First Russian expedition by G.IA. Sedov to the North Pole.
Mor. flot 22 no.8:40-41 Ag '62. (MIRA 15:7)
(Arctic regions—Russian exploration)
(Sedov, Georgii Iakovlevich)

PAKHOMOV, N.

Improvement of the public areas of one's own city is the business of all workers. Zhil.-kom. khoz. 12 no.10:2-5 0 '62. (MIRA 16:2)

1. Pervyy sekretar' Ryazanskogo gorodskogo komiteta Kommunisticheskoy partii Sovetskogo Soyuza.
(Ryazan--Landscape gardening)

PAKHOMOV, N.

Itogi navigatsii 1935 g. i zadachi zimnei sudoremontnoi kampanii. [The results of navigation in 1935 and the problems of the winter ship repair campaign]. (Mirovoe khoz-vo, 1935, no. 11-12, p. 89-105).

Maritime transport (p. 93)

DLC: HC331.P52

SC: Soviet Transportation and Communications, Library of Congress,
Reference Department, Washington, 1952, Unclassified

SHIMKO, I.G.; PAKHOMOV, N.A.

Introduction of new methods for process improvement at the
Kiev Combine. Khim. volok. no.4:6-7 '63. (MIRA 16:8)

1. Kiyevskiy kombinat iskusstvennogo i sinteticheskogo
volokna (for Shimko). 2. Kiyevskiy filial Gosudarstvennogo
institut po proyektirovaniyu predpriyatiy iskusstvennogo
volokna (for Pakhomov).

PAKHOMOV, N. I.

Direktivy pravitel'stva i zadachi vodnogo transporta. [Directives of the government and the problems of waterway transportation]. Moskva, 1936. 27 p.
DLC: Slavic unclass.

Itogi navigatsii 1935 g. i zadachi zimnei sudoremontnoi kampanii. [Results of the navigation in 1935 and the problems of the winter campaign for ship repair.] (Planovoe khoz-vo, 1935, no. 11-12, p. 89-105). DLC: HC331.P52

Ocherenye zadachi vodnogo transporta. [Next problems of waterway transportation]. (Planovoe khozvo, 1934, no. 12, p. 41-51). DLC: HC331.P52

SO: Soviet Transportation and Communications, A Bibliography, Library of Congress, Reference Department, Washington, 1952, Unclassified.

PAKHOMOV, N.M.

Selecting the efficient and safe parameters for solid borehole charges.
Khim.prom. no.1:33-39 Ja '64. (MIRA 17:2)

VOLODIN, V.Ye.; PAKHOMOV, N.M.; DERESHKEVICH, Yu.V.; PASECHNIK, K.A.;
BUKHARIN, Ye.V.; MOISEYEVA, Ye.I.. Prinimeli uchastiye: GRISHIN,
M.Ye., inzh.; PROTOSAVITSKAYA, Ye.A., inzh.; GOFEN, D.A., inzh.;
VINARSKIY, V.I., inzh.; PLUTENKO, V.P., inzh.. MOSHCHANSKIY,
N.A., nauchnyy red.; TYAPKIN, B.G., red.izd-va; GURVICH, E.A.,
red.izd-va; MEDVEDEV, L.Ya., tekhn.red.

[Anticorrosive coatings for construction elements and apparatus;
handbook] Antikorroziinnye pokrytiia stroitel'nykh konstruktsii i
apparatury; spravochnoe posobie. Moskva, Gos.izd-vo lit-ry po
stroit., arkhitekt. i stroit.materialam, 1959. 266 p. (MIRA 13:4)

1. Russia (1917- R.S.F.S.R.). Glavnoye upravleniye po montazhu
tekhnologicheskogo oborudovaniya i proizvodstvu montazhnykh rabot.
2. Proyektno-konstruktorskoye byuro tresta Montazhkhimzashchita
(for Volodin, Pakhomov, Dereshkevich, Pasechnik, Bukharin, Moise-
yeva).

(Protective coatings) (Building materials)

PAKHOMOV, N.M.; STOYKO, I.V.

Introduction of an enlarged borehole pattern at the
open-cut mine of the Rozdol Sulfur Combine. Khim.prom.
no.10:773-776 0 '62. (MIRA 15:12)
(Rozdol—Sulfur mines and mining)

L 52096-65 EPF(c)/EPR/EWT(m)/EWP(j)/T/EWP(v)

Pc-4/Pr-4/Pa-4 RM/WM
UR/0286/65/000/009/0047/0047

ACCESSION NR: AP5015265

AUTHORS: Pakhomov, N. M.; Garber, Yu. I.; Gol'denberg, N. L.; Bret, T. V.

30
B

TITLE: A method for obtaining coatings. Class 22, No. 170597

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 9, 1965, 47

TOPIC TAGS: metal coating, concrete / arsamite, FR 12 cement

ABSTRACT: This Author Certificate presents a method for obtaining arsamite-based coatings on metallic or concrete surfaces. To improve the adhesion of the coatings to metal and concrete, arsamite is spread over a layer of cement FR-12.

ASSOCIATION: none

SUBMITTED: 27Jul63

ENCL: 00

SUB CODE: I3,MM

NO REF SOV: 000

OTHER: 000

FR-12=Plastic glue

Cord 11

PAKHOMOV, N.M.

Determining the operating efficiency of the excavator in relation to the degree of crushing of the rock. Shakht.stroi. 6
no.1:14-16 Ja '62. (MIRA 14:12)

1. Gosudarstvennyy nauchno-issledovatel'skiy institut gornokhimi-
cheskogo syr'ya.
(Excavating machinery)

KOPERIN, V.V., inzh.; PAKHOMOV, N.M., inzh.

Anticorrosion work in Finland. Mont. i spets. rab. v stroi.
24 no.9:22-26 S '62. (MIRA 15:9)
(Finland--Corrosion and anticorrosives)

ALEKSEYEV, S.N.; ANTIPIN, V.A.; ARTAMONOV, V.S.; BALALAYEV, G.A.,
inzh.; VOLODIN, V.Ye.; GOL'DENBERG, N.L.; GORINA, B.S.;
GOFEN, D.A.; GRISHIN, M.Ye.; DERESHKEVICH, Yu.V.;
DORONENKOV, I.M.; KLINOV, I.Ya., doktor tekhn. nauk, prof.;
LEYRIKH, V.E.; LUTONIN, N.V.; MOLOKANOV, A.V., dots.;
NOGIN, A.Ya.; PAKHOMOV, N.M.; PROTOSAVITSKAYA, Ye.A.;
ROMOV, I.V.; CHAPLITSKIY, L.A.; TSEYTLIN, A.G.; STRAV'YE, P.K.;
MOSHCHANSKIY, N.A., doktor tekhn. nauk, prof., red.;
PEREVALYUK, M.V., red.izd-va; TEMKINA, Ye.L., tekhn.red.

[Corrosion protection in the construction of industrial
buildings] Zashchita ot korrozii v promyshlennom stroit'l'-
stve. Moskva, Gosstroizdat, 1963. 406 p. (MIRA 16:12)

(Corrosion and anticorrosives)
(Industrial buildings)

PAKHOMOV, N.M.

Calculating blasting charges in accordance with the distance
separating them. Khim.prom. no.2:114-120 F '62. (MIRA 15:2)
(Blasting)

VOLODIN, V.Ye.; DERESHKEVICH, Yu.V.; PAKHOMOV, N.M.; PASECHNIK, K.A.;
 BUKHARIN, Ye.V.; MOISEYEVA, Ye.I. Prinimali uchastiye: GRISHIN,
 M.Ye., inzh.; PROTOSAVITSKAYA, Ye.A., inzh.; GOFEN, D.A., inzh.;
 VINARSKIY, V.I., inzh.; PLUTENKO, V.P., inzh.; MOSHCHANSKIY, N.A.,
 nauchnyy red.; TYAPKIN, B.G., red.izd-va; GURVICH, E.A., red.izd-va;
 MEDVEDEV, L.Ya., tekhn.red.

[Anticorrosive coatings for engineering structures and apparatus;
 a manual] Antikorroziinnye pokrytiia stroitel'nykh konstruktsii
 i apparatury; spravochnoe posobie. Moskva, Gos.izd-vo lit-ry po
 stroit., arkhitekt. i stroit.materialam, 1959. 266 p. (MIRA 12:8)

1. Russia (1917- R.S.F.S.R.) Ministerstvo stroitel'stva. 2. Pro-
 yektno-konstruktorskoye byuro tresta Montazhkhimzashchita (for Volo-
 din, Dereshkevich, Pakhomov, Pasechnik, Bukhatin, Moiseyeva).
 (Protective coatings) (Factories--Equipment and supplies)

PAKHOMOV, N.V., agronom.

Great victory of state farms on virgin and idle lands. Nauka i pered.
op. v sel'khoz. 6 no.12:30-31 D '56. (MLRA 10:1)
(Reclamation of land)

TITANOMETRY FOR THE DETERMINATION OF IRON AND CHROMIUM IN IRON OR IRON-CHROMIUM TANNING BATHS. N. Belyaev and P. Pakhomov. *Koshrenno Obozryaya*. Prom. 12, 1972. (USSR). *Chemie et Industrie* 31, 1181. A description of the determination of Fe and Cr, both separately and in presence of each other, by titration with $\text{Ti}(\text{SO})_4$.

PAKHOMOV, O. I., IVASHKIN, A. M., FEDORENKO, V. I., SHKUD, M. A., GEL'MAN, F. A., RYABOV, K. M., and KUCHUK, Ye. N.

Antenna Switch, Patent, Class 21a⁴. 72₀₄, no. 103460, Elektrosvyaz'
No. 1, Jan 57.

PAKHOMOV, P.A., inzh.

Theory of float valves of drawatts. Vod. i san. tekhn. no. 4:6-9
Ap '64 (MIRA 18:1)

PAKHOMOV, Petr Aleksandrovich; POLTORATSKAYA, E., red.; GRISHKO, T.,
tekh.n.red.

[Eliminating air from hot-water heating systems] Vozdukhoda-
lenie iz sistem vodianogo otopeniia. Kiev, Gos.izd-vo lit-ry
po stroit. i arkht. USSR, 1963. 58 p. (MIRA 15:5)
(Hot-water heating)

40373-66 RT(1)/F.I(m)/P(t)/ETI 1J(c) AL J

ACC NR: AP6023263 SOURCE CODE: UR/0057/66/036/007/1312/1314

AUTHOR: Pakhomov, P.L.; Fugol', I. Ya.; Shevchenko, Yu.F.

ORG: none

TITLE: Temperature dependence of the diffusion cross section of metastable helium atoms in helium

SOURCE: Zhurnal tekhnicheskoy fiziki, v. 36, no. 7, 1312-1314

TOPIC TAGS: helium, metastable state, gas diffusion, plasma diffusion, particle cross section

ABSTRACT: The authors have measured the diffusion cross section (defined as $v/3ND$, where v is the mean atomic velocity, N is the gas density, and D is the diffusion constant) of metastable (2^3S_1) helium atoms in helium gas at 77, 64, and 20° K by a plasma technique that has been described in detail by I.Ya.Fugol', P.L.Pakhomov, and G.P.Reznikov (Opt. i spektr., 16, 941, 1964). Plasmas were produced by 40 MHz discharges in a quartz tube containing helium at pressures (reduced to room temperature) ranging from 0.1 to 1.0 mm Hg and their decay was followed for up to 1.5 millisecc by recording the absorption of the 3889 Å $2^3S - 3^3P$ helium line. The diffusion constants, calculated from the exponential decay curves on the assumption that the plasmas decayed entirely by diffusion to the wall of the vessel, were inversely proportional to the pressure within the 15% experimental error. The measured diffusion cross sections

UDC: 533.9.07

Card 1/2

L 40473-66

ACC NR: AP6025263

were in good agreement with the theory of R.A.Buckingham and A.Dalgarno (Proc.Roy. Soc. A213, 506, 1952). The diffusion cross section at 77° K (approximately $4.5 \times 10^{-15} \text{ cm}^2$) was 50% lower than that found by A.V.Phelps and J.P.Molnar (Phys.Rev., 89, 1204, 1953). At 20° K the diffusion cross section was $5 \times 10^{-15} \text{ cm}^2$. Orig. art. has: 5 formulas and 3 figures. [15]

SUB CODE: 20

SUBM DATE: 02Aug65

ORIG.REF: 001

OTH REF: 005

ATD PRESS: 5053

Card 2/2 MLP

L 08358-67 EWT(1)/EWT(m)/EWP(t)/ETI IJP(c) JD/AT
ACC NR: AR6020133

SOURCE CODE: UR/0058/66/000/005/DO56/DO56
63

AUTHOR: Pakhomov, P. L.; Fugol', I. Ya.

TITLE: Spectroscopic investigation of a decaying helium plasma at 77 and 20K

SOURCE: Ref. zh. Fizika, Abs. 5D431

REF. SOURCE: Fiz.-tekhn. in-t nizek. temperatur AN UkrSSR, Khar'kov, 1965, 53 str.

TOPIC TAGS: helium plasma, plasma decay, metastable state, discharge plasma, atomic spectrum, spectral line

ABSTRACT: The processes of destruction of metastable He atoms in a decaying plasma of a pulsed high-frequency discharge at 77 and 20K and the kinetics of the de-excitation of the He lines are investigated. An intense afterglow of a number of lines of atomic helium was observed at pressures 8 -- 40 mm Hg. The theory of the afterglow is based on taking simultaneous account of two processes: formation of molecular helium ions and electrons as a result of the destruction of the metastable atoms, and subsequent recombination of the molecular ions and electrons. The rates of the main processes of destruction of metastable atoms and the coefficients of recombination at low temperatures are determined. [Translation of abstract]

SUB CODE: 20

Cord 1/1 not

L 16391-65 EWA(k)/EWT(l)/EWG(k)/EWT(m)/EPA(sp)-2/EPT(c)/EEC(k)-2/EPA(w)-2/EEC(t)/
T/EWP(t)/EEC(b)-2/EWP(k)/EWP(b)/EWA(m)-2 Po-4/Pz-6/Fab-10/Pf-4/Pr-4/Pi-4/Pl-4
ACCESSION NR: AP4049129IJP(c)/SSD(b) WG/S/0020/64/159/001/0057/0059

JHB/JD/AT

AUTHORS: Pakhomov, P. L.; Fugol', I. Ya.

TITLE: Pair collisions of metastable helium atoms in a plasma

SOURCE: AN SSSR. Doklady*, v. 159, no. 1, 1964, 57-59

TOPIC TAGS: helium atom, metastable state, pair collision, plasma
afterglow quenching.

ABSTRACT: Pair collision of metastable 2^3S helium atoms is one of three factors governing the afterglow of a helium plasma following termination of the discharge, but has been least investigated, in spite of its being the dominant factor in the 5--15 mm Hg pressure range. The authors investigated the time dependence of the metastable atom concentration after termination of a high-frequency discharge pulse at 77K, at pressures from 6 to 74 mm. The metastable atom concentration was measured by means of the absorption of the

Card 1/2

L 16391-65

ACCESSION NR: AP4049129

2

3889 Å line in a discharge tube 20 mm in diameter and 150 mm long. The details of the experiments are described elsewhere (the authors with G. P. Reznikov, Opt. i spektr. v. 16, no. 6, 25, 1964). The reciprocal of the concentration plotted against the time is a straight line, with a slope that increases with the pressure. Comparison with experiments made by A. V. Phelps and S. C. Browne (Phys. Rev. v. 86, 102, 1952) at 300K shows that the rate of the process decreases to one-half on going from 300 to 77K, probably because of the decrease in the average particle velocity. This report was presented by I. V. Obreimov. Orig. art. has: 2 figures and 7 formulas.

ASSOCIATION: Fiziko-tekhnicheskiy institut nizkikh temperatur Akademii nauk SSSR (Physicotechnical Institute of Low Temperatures, Academy of Sciences SSSR)

SUBMITTED: 06May64

ENCL: 00

SUB CODE: ME, NP

NR REF SOV: 002

OTHER: 005

Card 2/2

ACCESSION NR: AP4039701

S/0051/64/016/006/0941/0948

AUTHORS: Fugol', I. Ya.; Pakhomov, P. L.; Reznikov, G. P.

TITLE: Spectroscopic investigation of a pulsed high-frequency discharge in helium

SOURCE: Optika i spektroskopiya, v. 16, no. 6, 1964, 941-948

TOPIC TAGS: discharge plasma, plasma decay, spectral line intensity, atomic spectroscopy, recombination, metastable state

ABSTRACT: The kinetics of the excitation and breakdown of a helium plasma was investigated under conditions of a pulsed electrodeless high-frequency discharge in the pressure interval 0.1--40 mm Hg, at room temperature (290K) and at the temperature of liquid nitrogen (77K), and at different values of the power. The experimental setup and technique are described. The decrease in line intensity during the time of the high-frequency pulse at 290K is attributed to atomic

Cord 1/3

L 15556-66

ACC NR: AP6004401

ENT(1)/ENT(m)/ETC(F)/EPF(n)-2/ENG(m)/ENP(t)/ENP(b) LJP(e) JD/AT

SOURCE CODE: UR/0051/66/020/001/0010/0020

AUTHOR: Pakhomov, P. L.; Raznikov, G. P.; Fugol', I. Ya.

ORG: none

TITLE: Helium afterglow in a pulsed hf discharge plasma at 77°K

SOURCE: Optika i spektroskopiya, v. 20, no. 1, 1966, 10-20

TOPIC TAGS: discharge plasma, helium plasma, luminescence

ABSTRACT: The authors determine the rates of fundamental afterglow processes under high frequency pulsed discharge conditions at a temperature of 77°K and explain the mechanism responsible for the intense afterglow in a helium hf discharge plasma at a low temperature. The experimental equipment is described. The plasma radiation and concentration of metastable He(2³S) atoms in the afterglow were measured. It is shown that the curve for concentration of metastable atoms as a function of time at pressures of 8-60 mm Hg is a close approximation of a hyperbola. The recombination coefficient is a linear function of pressure, which indicates that collisions between metastable atoms take place with the participation of helium atoms in the normal state. Experimental measurements show that the triple-collision process

Card 1/2

UDC: 533.9

2

APPROVED FOR RELEASE: Tuesday, August 01, 2000



CIA-RDP86-00513R001238

L 15556-66

ACC NR: AP6004401



is most probable at pressures above 5 mm Hg. It is shown that dissociative recombination is the fundamental process for deionization of charged particles in a high frequency pulsed discharge plasma. Theoretical considerations indicate that the basic reactions responsible for intense atomic afterglow are:



A differential equation is given for the variation in ion (or electron) concentration n in the afterglow of a helium plasma in conformity with these two processes. The two proposed mechanisms are used as the basis for a theory explaining the fundamental kinetics of line luminescence and afterglow. The recombination reaction is confirmed by the experimentally observed distribution of excited atoms with respect to levels in the afterglow. In conclusion we are sincerely grateful to I. V. Obreimov for valuable consultation and interest in the work and also to A. M. Ratner for useful discussions. Orig. art. has: 5 figures, 35 formulas.

SUB CODE: 20/ SUBM DATE: 13Nov64/ ORIG REF: 003/ OTH REF: 007

Card 2/2

L 26127-66 EWT(1)/EWT(m)/ETC(f)/EPF(n)-2/ENG(m)/ENP(j)/T IJP(c) JD/WW/JW/AT/RM
ACC NR: AP6015800 SOURCE CODE: UR/0386/66/003/010/0389/0394

AUTHOR: Gugol', I. Ya.; Pakhomov, P. L.

ORG: Physicotechnical Institute of Low Temperatures, Academy of Sciences Ukrainian SSR (Fiziko-tehnicheskii institut niskikh temperatur Akademii nauk Ukrainsskoy SSR)

TITLE: Diffusion of metastable helium atoms in a cryogenic plasma

SOURCE: Zhurnal eksperimental'noy i teoreticheskoy fiziki. Pis'ma v redaktsiyu. Prilozheniye, v. 3, no. 10, 1966, 389-394

TOPIC TAGS: helium plasma, cryogenic effect, metastable state, electron scattering, physical diffusion, pressure effect, scattering cross section

ABSTRACT: The authors have investigated the rate of diffusion disintegration of metastable helium atoms in a decaying helium plasma at a temperature lower than 6K (called a cryogenic plasma). The helium plasma was excited in a quartz cuvette immersed in liquid helium at 4.2 and 1.8K. The excitation was by an electrodeless method with pulses from a high-frequency discharge of 0.08 msec duration, repeated every 40 msec. The concentration of the metastable helium atoms in the state 2^3S_1 was determined from the resonance absorption of the 3889 Å line from an external source. The details of a similar experiment at 77 and 20K can be found in the authors' earlier papers (Optika i spektroskopiya v. 20, 10, 1966, and others). Measurements of the kinetics of the variation of the density of the metastable helium atoms have shown that, in accordance with the previously obtained results at 300, 77, and 20K, the disintegration of the metastable states at low gas densities ($n \approx 10^{-6}$)

Card 1/2

L 26127-66

ACC NR: AP6015800

$\times 10^{10} \text{ cm}^{-3}$) is exponential with an exponent inversely proportional to the pressure p . If the results obtained for a cryogenic plasma, like those for a plasma at higher temperatures, are interpreted with the aid of the diffusion mechanism of disintegration of metastable atoms, then the diffusion leads to the exponential time variation of the concentration and the exponent has then the meaning of the diffusion collision frequency. Analysis of the temperature dependence of the diffusion coefficient of metastable helium atoms shows that it increases sharply in a cryogenic plasma. This may be connected with the change in the diffusion scattering cross section for slow collisions. Although the usual scheme of solving the scattering problem does not explain the observed decrease of the diffusion cross section at low energies, it is proposed that an analogy exists between the authors' data on the value of the cross section for the diffusion of metastable atoms in a cryogenic helium plasma and recent theoretical and experimental results by others on the scattering of slow electrons by helium atoms. Orig. art. has: 3 figures and 2 formulas.

SUB CODE: 20/ SUBM DATE: 07Mar66/ ORIG REF: 003/ OTH REF: 006

Card 2/2 *JP*

ACC NR: AP7002420

SOURCE CODE: UR/0051/66/021/006/0741/0748

AUTHOR: Fugol', I. Ya.; Pakhomov, P. L.; Shevchenko, Yu. P.

ORG: none

TITLE: Spectroscopic investigation of decaying helium plasma at 20K

SOURCE: Optika i spektroskopiya, v. 21, no. 6, 1966, 741-748

TOPIC TAGS: helium plasma, plasma decay, plasma diffusion, metastable state

ABSTRACT:

The helium plasma was excited in a quartz tube submerged in liquid hydrogen (20.4K). The luminescence was recorded through the liquid hydrogen. The helium pressure was varied from 0.1 to 80 mm Hg. The concentration of metastable atoms in the afterglow was determined by the absorption of the 3889 Å line from an external source. The rate of pair collision, on which depends the decay of metastable atoms and the diffusion coefficient D at different pressure p of metastable atoms, was determined. The average value for Dp at 20K is $(Dp)_{aver} = 95 \text{ cm}^2 \cdot \text{sec}^{-1} \cdot \text{mm Hg}$. A comparison of results shows that below 77K the variation of the diffusion coefficient does not follow the classical dependence $Dp \sim \sqrt{T}$, a fact which is possibly linked with the effect of the quantum features of the diffusion process in helium at low

Card 1/2

UDC: 533.9 : 546.291

ACC NR: AP7002420

temperatures. The character of the afterglow of helium plasma at 20K is similar to the afterglow at 77K. The only intensive afterglow was that of the atomic lines He I. The duration of afterglow was 150—200 μ sec. Orig. art. has: 26 formulas, 5 figures, and 3 tables.

SUB CODE: 20/ SUBM DATE: 10May65/ ORIG REF: 003/ OTH REF: 002/ ATD PRESS: 5112

Card 2/2

PAKHOMOV, S.; RUDNITSKIY, M.

Outmoded wage terms. Sots.trud. no.9:63-66 S '56. (MIRA 9:12)
(Copper mines and mining) (Wages)

PAKHOMOV, S.; RADCHENKO, Ye.

Fish Culture

Pond fish culture on collective farm,

9. Monthly List of Russian Accessions, Library of Congress, May 1953. Unclassified.

PAKHOMOV, S.

Root causes preventing a growth in output. Sets.trud.no.3:70-73
Mr '56. (MIRA 9:7)
(Karabash--Copper mines and mining) (Labor productivity)

PAKHOMOV, S. I.

Class 21a⁴, 72^{OL}, No. 10297^F. M. A. Shkud, I. L. Gel'mar, K. M. Ignatov, Ye. N. Kuchuk, S. I. Pakhomov, A. M. Ivasnkin and V. I. Fedorenko. Device for Switching Antennas.

Authors' Certificates, Elektrosvyaz' No. 7, 1956.

MASURENKOV, Yu.P.; PAKHOMOV, S.I.

Geochemistry of chlorine. Dokl. AN SSSR 139 no.2:453-455 J1 '61.

(MIRA 14:7)

1. Predstavleno akademikom D.I. Shcherbakovym.
(Elbrus region--Chlorine) (Geochemistry)

KISSIN, I.G.; PAKHOMOV, S.I.

Some data on the role of high temperatures and pressures in the formation of the chemical composition of underground waters. Dokl. AN SSSR 163 no.1:201-204 J1 '65. (MIRA 18:7)

1. Severo-Kavkazskoye otdeleniye Proizvodstvennogo i nauchno-issledovatel'skogo instituta po inzhenernym izyskaniyam v stroitel'stve. Submitted February 10, 1965.

PANTELEYEV, I.Ya.; MASURENKOV, Yu.P.; PAKHOMOV, S.I.

Origin of carbon dioxide in underground waters. Izv. AN
SSSR. Ser.geol. 27 no.6:95-98 Je '62. (MIRA 15:5)

1. Severo-Kavkazskoye otdeleniye laboratorii gidrogeologicheskikh
problem AN SSSR, g. Stavropol'.
(Water, Underground) (Carbon dioxide)

OV,
OSTRYKAU, M.S.; PAKHOMAU, S.I.; SINEL'NIKAU, N.P.

Forces that cause the contraction of helium substances on drying.
Vestsi AN BSSR. Ser. fiz.-tekhn. nav. no.4:119-131 '56. (MLRA 10:6)
(Helium) (Drying)

DOROKHOV, S.M.; PAKHOMOV, S.P.; POLYAKOV, G.D.; NECHAYEVA, Ye.G., red.;
PEDOTOVA, A.P., tekhn.red.

[Raising fish in ponds] Prudovoe rybovodstvo. Pod red. G.D.
Poliakova. Moskva, Gos.izd-vo sel'khoz.lit-ry, 1958. 295 p.
(MIRA 12:4)

(Fish culture)

PAKHOMOV, S.P., kandidat biologicheskikh nauk.

Study of collective farm bodies of water in forest and forest-steppe districts with a view towards their use in fish culture.
Trudy sov.Ikht.kom. no.2:101-106 '53. (MLRA 7:7)

1. Vserossiyskiy nauchno-issledovatel'skiy institut prudovogo
rybnogo khozyaystva - VNIIPREh.
(Hydrology) (Fish culture)

PAKHOMOV, S.F.

Volga Valley - Fish Culture

Collective farm pond fish culture of the Lower Volga Valley and prospects for its development. Ryb. khoz. 28 No. 5 1952.

Monthly List of Russian Accessions. Library of Congress. October 1952. Unclassified.

1. PAKHOMOV, S. P. ; RADCHENKO, Ye. P.
2. USSR (600)
4. Carp - Stalingrad Reservoir
7. Ways to create reserves of Volga carp in the Stalingrad Reservoir. S. P. Pakhomov, Ye. P. Radchenko, Ryb. khoz. 29 no. 3 '53.
9. Monthly List of Russian Accessions, Library of Congress, APRIL 1953, Uncl.

PAKHOMOV, S.P.

Fish Culture--Volga Valley

Collective farm and fish culture on the Lower Volga valley and prospects for its development. Ryb.khoz. 23, no 1, 1952.

MONTHLY LIST OF RUSSIAN ACQUISITIONS, LIBRARY OF CONGRESS, OCTOBER 1952. 121100 1127.

PAKHOMOV, S.P.

AKHMEROV, A.Kh., kand.biol.nauk; BATENKO, A.I., kand.sel'skokhoz.nauk;
BRUDASTOVA, M.A., kand.tekhn.nauk; GOLOVINSKAYA, K.A., kand.biolog.
nauk; GORDON, L.M., kand.ekon.nauk; DOROKHOV, S.M., rybovod-biolog;
YEROKHINA, L.V., rybovod-biolog; IL'IN, V.M., rybovod-biolog;
ISAYEV, A.I., rybovod-biolog; KADZEVICH, G.V., rybovod-biolog;
KOMAROVA, I.V., kand.biol.nauk; KRYMOVA, R.V., rybovod-biolog;
KULAKOVA, A.M., rybovod-biolog; MAMONTOVA, L.N., kand.biol.nauk;
MEYSNER, Ye.V., kand.biol.nauk; MIKHEYEV, P.V., kand.biol.nauk;
MUKHINA, R.I., kand.biol.nauk; PAKHOMOV, S.P., kand.biol.nauk;
SUKHOVERKHOV, P.M., kand.biol.nauk; SOKOLOVA, Z.P., rybovod-bio-
log; TSIUNCHIK, R.I., rybovod-biolog; RYZHENKO, M.I., red.; KOSOVA,
O.N., red.; SOKOLOVA, L.A., tekhn.red.

[Handbook on pond fish culture] Spravochnik po prudovomu rybovodstvu.
Red.kollegiia: A.I.Isaev i dr. Moskva, Pishchepromizdat, 1959. 374 p.
(MIRA 13:4)

1. Moscow. Vserossiyskiy nauchno-issledovatel'skiy institut prudo-
vogo rybnogo khozyaystva.
(Fish culture)

PAKHOMOV, S.P., kand.biol.nauk; FEDOSOVA, G.V.

Popd fish culture. Priroda 50 no.4:49-52 Ap '61. (MIRA 14:4)

1. Vserossiyskiy nauchno-issledovatel'skiy institut prudovogo
rybnogo khozyaystva, Moskva.
(Fish culture)

PAKHOMOV, S.P. (Chita (B.S.), ul. Lenina, 223, kv. 33)

Formation of the median and lateral nerves and the accompanying anomalies of the axillary artery in man. Arkh. anat., gist. i embr. 43 no. 12:66-68 1961 (JIRA 17:5)

1. Kafedra operativnoy khirurgii s topograficheskoy anatomiyey (ispolnyayushchiy obyazannosti zaveduyushchego - kand. med. nauk S.P. Pakhomov) Chitinskogo meditsinskogo instituta.